

xantrex™

FREEDOM X INVERTER DATASHEET



AVAILABLE IN:
24V \equiv
2000W

ROBUST. DURABLE. FLEXIBLE.

The FREEDOM X inverter offers premium performance in a lightweight compact package. It cranks out full output from -4°F - 104°F (-20°C - 40°C) for operation in all climate temperatures. The extended surge rating of the FREEDOM X makes it ideal to start difficult loads including fridge and microwave. The quick connect terminals at AC IN/OUT make installation a breeze.



Exceptional full rated performance in all climate temperatures



True sine wave output for sensitive and motor loads



Ignition control feature turns inverter on/off via 24VDC signal



View, control and configure via Bluetooth app¹ on iOS and Android

APPLICATIONS:



ETL listed to CSA Standard C22.2 No. 107.1 and UL 458* with Marine supplement

*For marine supplement compliance drip shield in specific mounting orientation is required. See installation guide.


**2 YEAR
WARRANTY**

www.xantrex.com
CUSTOMER CARE: 1.800.670.0707

Copyright © 2021 Xantrex LLC. All Rights Reserved. All trademarks are owned by Xantrex LLC.
¹requires FREEDOM X Bluetooth Remote Panel, part #808-0817-02



TOP VIEW

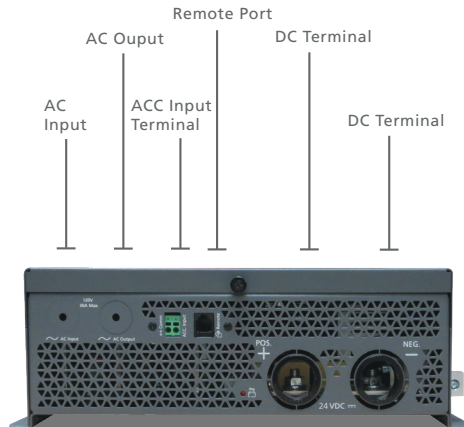

SIDE VIEW



SIDE VIEW

INVERTER FEATURES

Extended Surge Rating

- Surges to 2X continuous power for at least 2 seconds for motor loads

True Sine Wave AC Power

- For operation of sensitive and motor loads

Ignition Control

- Feature to turn inverter on/off via a 24VDC signal and to minimize battery drain by switching the inverter off when the ignition key is turned off

Wide 20-32 VDC Input Range

- Ensures inverter operation on high voltage alternators found on many new vehicle chassis

Built in 30A AC Transfer Relay

- Senses when outside AC Power is present and transfers the load from the inverter to the source of incoming power

Programmable AC Under-Voltage (85-110VAC) Shutdown

- Feature ideal to operate under weak shore power or generator input

FREEDOM X BLUETOOTH REMOTE PANEL + FXC CONTROL MOBILE APP



FREEDOM X BLUETOOTH REMOTE PANEL
(808-0817-02)

- Easily monitor system status
- Monitor alerts
- Change settings conveniently
- Connect via bluetooth
- Available on Android and iOS



DOWNLOAD ON



CONNECT WITH Bluetooth

ELECTRICAL SPECS - INVERTER


	FREEDOM X 2000
AC Output Operating Voltage Options	120, 110, 108 VAC
Continuous Output Power	Continuous Power 2000 W @40°C True sine wave (TSW)
Continuous AC Output Current	16.7 A
Surge Power (>2 sec)	4000 W
Frequency (Configurable)	60 (or 50) Hz
AC Operating Voltage Range	85-140 VAC
AC Safe Non-Operating Voltage Range	Up to 240 VAC
Operating voltage range	20.0 - 31.0 VDC
Max Non-Operating Voltage	50.4 VDC
Nominal Voltage (inverting)	24.0 V
Nominal Current at Full Load	96 ADC
Peak Efficiency	92.4%
Full Load Efficiency	≥ 90.9%

GENERAL SPECS

	FREEDOM X 2000
Operating Temperature Range	-4 to 140°F (-20 to 60°C), with output derated above 104 °F (40 °C)
Storage Temperature Range	-40 to 158°F (-40 to 70°C)
Operating Humidity Range	5 to 95% RH, non-condensing
Transfer Relay AC Current Rating	30A (24A continuous)
Part Number	817-2000-21
L x W x H (without flanges)	14.6" x 10.8" x 3.9" (370mm x 275mm x 100mm)
L x W x H (with flanges)	14.6" x 12" x 3.9" (370mm x 305mm x 100mm)
Net Weight	15.9 lbs (7.2kgs)


REGULATORY APPROVALS

	FREEDOM X 2000
Safety	ETL listed to CSA 107.1, UL458 and UL458 Marine Supplement (drip shield with product number 808-1050 required) ABYC E-11, A-31
EMC	CFR 47, FCC, PART 15, Subpart B, Class B and CAN ICES-3 (B) / NMB-3 (B)

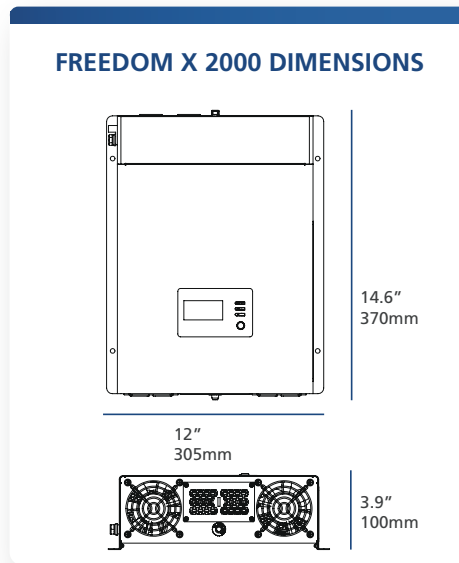


ACCESSORIES

Mfg Part #	Description
808-0817-01	FREEDOM X/XC Remote Panel (with 25' (7.62m) network cable)
808-0817-02	FREEDOM X Bluetooth Remote Panel (with 25' (7.62m) network cable)
31-6257-00 (7.62m), 31-6262-00 (15.24m)	Remote Panel Cable
808-9817	GFCI Option
808-1050	Drip Shield (for marine use)

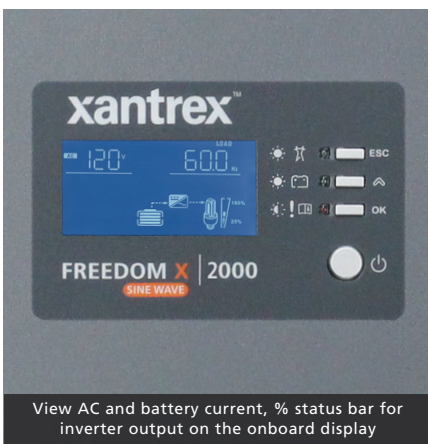

View AC and battery current, % status bar for inverter output on the onboard display

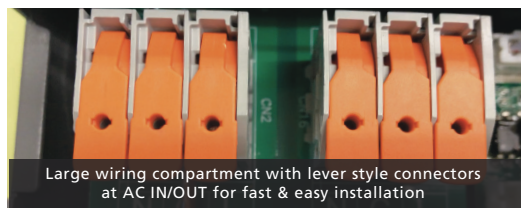

Large wiring compartment with lever style connectors at AC IN/OUT for fast & easy installation

ACC input terminal for connecting ignition control wiring. Remote port allows you to connect an accessory remote control or display device.



CONTACT

CUSTOMER SERVICE

1.800.670.0707
 customerservice@xantrex.com
 Hours of operation:
 6:30am - 4:30pm PST, Monday to Friday

facebook.com/Xantrex

@Xantrex

youtube.com/XantrexTechnology

LEARN MORE ON:

www.xantrex.com